


# Bolted Mechanical fittings

## Steel Lock series

### Coupling

Plain End to Plain End

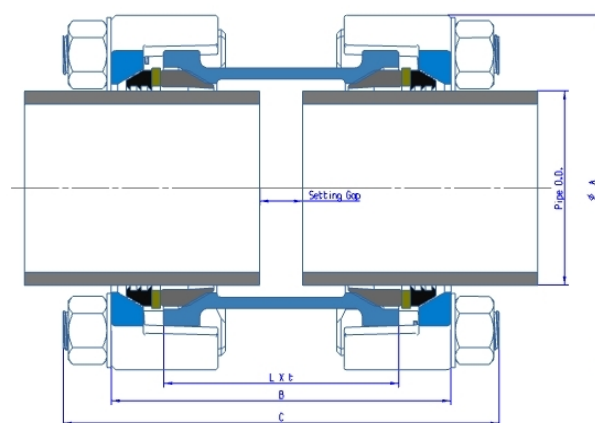

### Main Dimensions

Unit: mm

Size	Pipe O.D.	Coupling Overall			Body		Setting Gap		Bolts	Weight
	HIVP *	A	B	C	L	t	Min	Max	n- M x L	Kg
65	76	168	139	190	90	4.5	8	22	3-M18x76	4.4
80	89	182	166	204	110	5	9	32	3-M18x76	5.5
80L	89	182	216	254	160	5	9	82	3-M18x76	6.7
100	114	219	184	206	118	6	12	30	3-M18x76	8.9
100L	114	219	246	268	180	6	12	92	3-M18x76	10.7

\* JIS K 6742: Unplasticized poly (vinyl chloride) (PVC-U) pipes for water supply or other Imperial pipes including PVC pipe, PE Pipe, ABS pipe and Steel pipe.

# The Coupling is designed without pipe stopper in the middle of the body allowing pipe line repair usage. The whole coupling can be slid completely over the end of the pipe to enable a repair pipe piece inserted.



Qingdao Rockpower Machinery Co., Ltd.

1506, Sino-Commerce Building, 100, Middle Hongkong Road, Qingdao, China  
[www.rockpower.cn](http://www.rockpower.cn)

Tel.: (0532) 8592-1910 8592-1920 Fax.: (0532) 8592-1252  
 e-mail: [rockson@rockpower.cn](mailto:rockson@rockpower.cn)