


Bolted Mechanical fittings

Steel Lock series

Elbow 45° ,22.5°, 11.25°

Plain End to Plain End

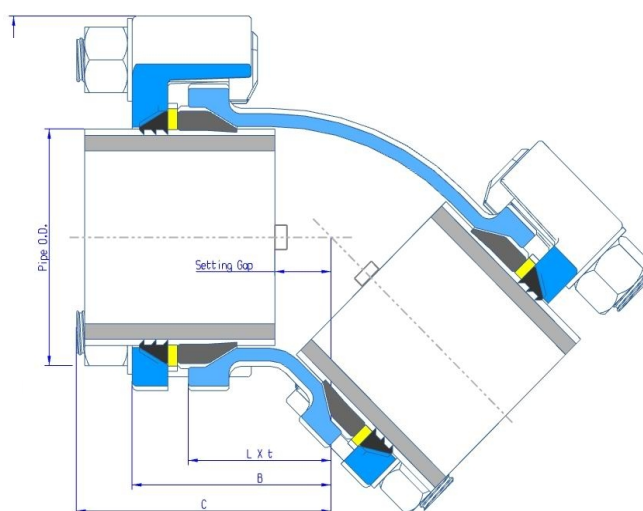

Main Dimensions

Unit: mm

Size	Pipe O.D.	Coupling Overall			Body		Setting Gap		Bolts	Weight
	HIVP *	A	B	C	L	t	Min	Max	n- M x L	Kg
65X45°	76	168	74	100	50	4.5	15	20	3-M18x76	5.1
80X45°	89	182	88	107	60	5	20	26	3-M18x76	5.7
80LX45°	89	182	146	166	118.5	5	39	85	3-M18x76	7.2
100X45°	114	219	107	118	74	6	27	35	3-M18x76	9.1
100LX45°	114	219	164	175	131	6	41	92	3-M18x76	11.6
65LX22.5°	76	168	88	114	64	4.5	14	34	3-M14x60	4.8
80X22.5°	89	182	92	112	64.5	5	25	31	3-M18x76	5.5
80LX22.5°	89	182	138	157	110	5	30	76	3-M18x76	7.1
100X22.5°	114	219	98	109	65	6	15	26	3-M18x76	8.7
100LX22.5°	114	219	156	167	123	6	33	84	3-M18x76	11.9
80X11.25°	89	182	82	101	54	5	14	20	3-M18x76	5.8
80LX11.25°	89	182	125	144	97	5	17	63	3-M18x76	6.8
100X11.25°	114	219	95	106	62	6	12	23	3-M18x76	9.3
100LX11.25°	114	219	138	149	105	6	15	66	3-M18x76	11.2

* JIS K 6742: Unplasticized poly (vinyl chloride) (PVC-U) pipes for water supply or other Imperial pipes including PVC pipe, PE Pipe, ABS pipe and Steel pipe.



Qingdao Rockpower Machinery Co., Ltd.

1506, Sino-Commerce Building, 100, Middle Hongkong Road, Qingdao, China
www.rockpower.cn

Tel.: (0532) 8592-1910 8592-1920 Fax.: (0532) 8592-1252
e-mail: rockson@rockpower.cn