


# Bolted Mechanical fittings

## Steel Lock series

### Outlet with Reducer

Plain End to Female Thread

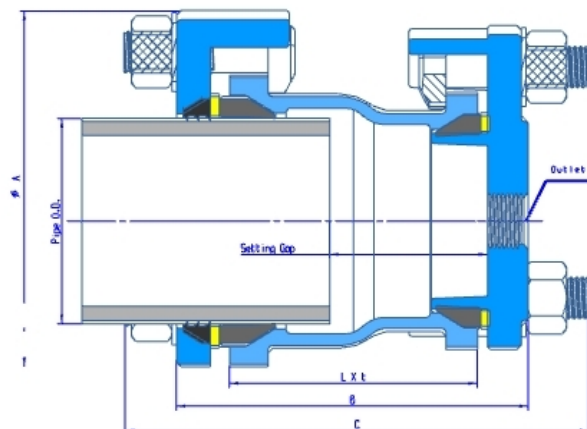

### Main Dimensions

Unit: mm

| Size | Pipe O.D. | Fitting Overall |     |     | Body |   | Setting Gap |     | Bolts    | Weight |
|------|-----------|-----------------|-----|-----|------|---|-------------|-----|----------|--------|
|      | HIVP * *  | A               | B   | C   | L    | t | Min         | Max | n- M x L | Kg     |
| 80   | 89        | 182             | 165 | 207 | 110  | 5 | 64          | 84  | 3-M18x76 | 6.1    |
| 100  | 114       | 219             | 202 | 236 | 142  | 6 | 73          | 114 | 3-M18x76 | 8.4    |

- \* JIS K 6742: Unplasticized poly (vinyl chloride) (PVC-U) pipes for water supply or other Imperial pipes including PVC pipe, PE Pipe, ABS pipe and Steel pipe.

This item can be supplied without outlet for use as end cap or with outlet connectable with threaded fittings. Outlet is available with 1/2", 3/4", 1", 1 1/4", 1 1/2" and 2" BSP or BSPT thread as per requirement.



Qingdao Rockpower Machinery Co., Ltd.

1506, Sino-Commerce Building, 100, Middle Hongkong Road, Qingdao, China Tel.: (0532) 8592-1910 8592-1920 Fax.: (0532) 8592-1252  
[www.rockpower.cn](http://www.rockpower.cn) e-mail: [rockson@rockpower.cn](mailto:rockson@rockpower.cn)